



PLY 1

design Jouko Kärkkäinen 2003
wall element
thin birch plywood
frame solid birch
size 595 x 595 mm

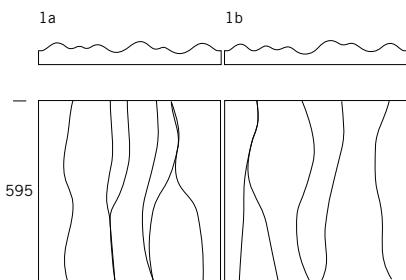


PLY 2

design Jouko Kärkkäinen 2003
wall element
thin birch plywood
frame solid birch
size 595 x 595 mm

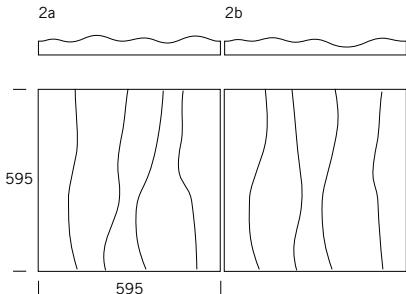


PLY 1 MATRIX

design Jouko Kärkkäinen 2005
wall element
thin birch plywood
frame solid birch
size 595 x 595 mm

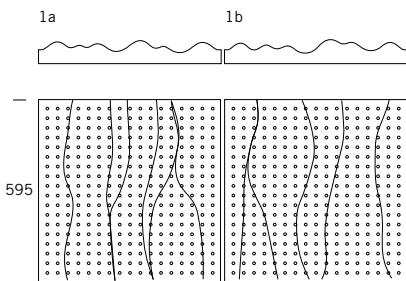


PLY 2 SKY

design Jouko Kärkkäinen 2005
wall element
thin birch plywood
frame solid birch
size 595 x 595 mm

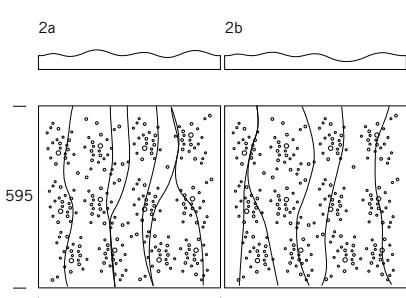

PLY 1 MOON

design Jouko Kärkkäinen 2005
wall element
thin birch plywood
frame solid birch
size 595 x 595 mm

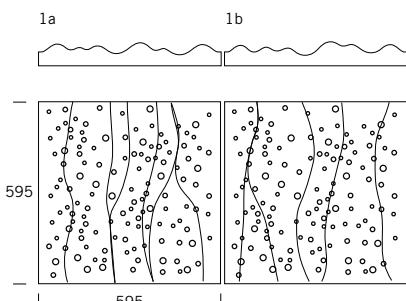

SHOWROOM FINLAND

Pohjoisranta 2 E
FIN-00170 Helsinki
tel +358 9 6811 940
fax +358 9 6811 9450
info@showroomfinland.fi
www.showroomfinland.fi



PLY WALL ELEMENT

SHOWROOM FINLAND

Pohjoisranta 2 E
FIN-00170 Helsinki
tel +358 9 6811 940
fax +358 9 6811 9450
info@showroomfinland.fi
www.showroomfinland.fi

PLY WALL ELEMENT

The PLY wall element is made of new, ultra thin birch plywood, almost see-through. The thickness of the material is 0,45 mm. This textile-like, thin plywood is attached to a solid wood frame, which again can be fixed to straight surfaces by stickers, velcro, picture hooks or screws.

There are two different models of PLY, a curvy one called PLY1 and a gentle wave called PLY2.

Both models come in two versions, mirror images of each other, so that the waves continue: PLY1A/PLY1B and PLY2A/PLY2B.

It is possible to perforate the elements.

The standard colour of the PLY is natural birch, lacquered. Other alternatives are dark grey or natural white stain. The elements can also be delivered without surface treatment.

Acoustic tests have been carried out in 2005. The test results are available at Showroom Finland.

DESIGN PL+US award 2004



DALLES MURALES PLY

Les dalles murales PLY sont composées d'un contreplaqué. Bouleau très fin (0,45mm), quasiment transparent, et d'un cadre usiné en bouleau massif. Ces dalles murales, reprenant les formes d'un drapé de textile, peuvent être facilement installées à l'aide de simples profils, vis, ou adhésifs double face.

Il existe deux différents modèles: un premier courbé, appelé PLY1, et un second plus légèrement ondulé, appelé PLY2. Chacun de ces modèles décliné en deux versions. L'une des versions étant le reflet de l'autre, il est possible de composer un ensemble mural complètement appareillé: PLY1A/PLY1B et PLY2A/PLY2B. Les dalles PLY peuvent également être perforées pour une performance acoustique optimum.

La couleur standard des dalles PLY est le bouleau naturel. Il existe d'autres alternatives, à savoir le gris foncé ou le blanc naturel, réalisées à base de teintes sur le bois. Les dalles peuvent être fournies vernies ou uniquement poncées.


Des tests acoustiques ont été effectués en 2005. Les certificats sont disponibles sur simple demande auprès de votre fournisseur.

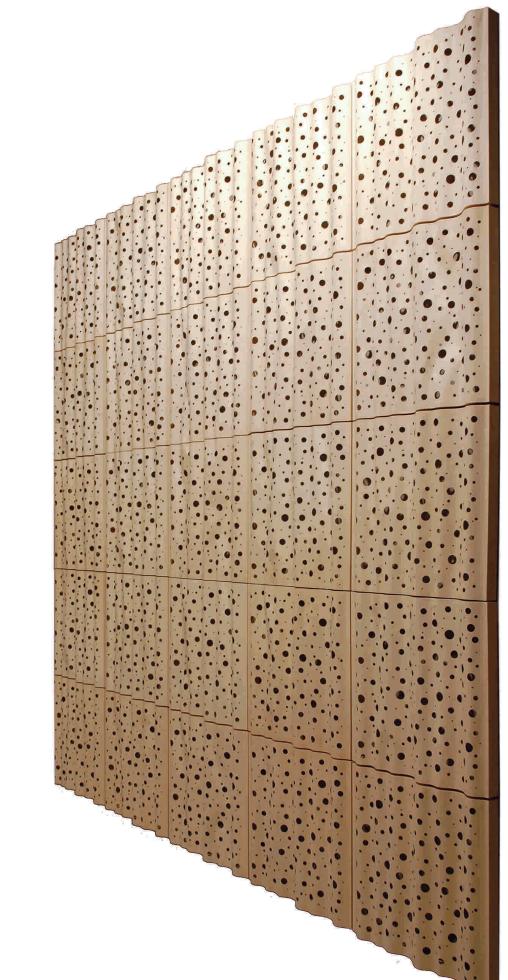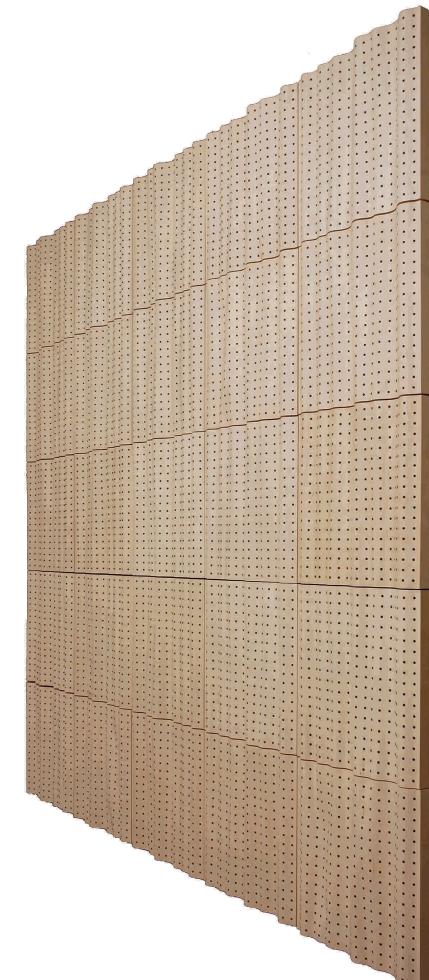

PLY front light




PLY front and back light

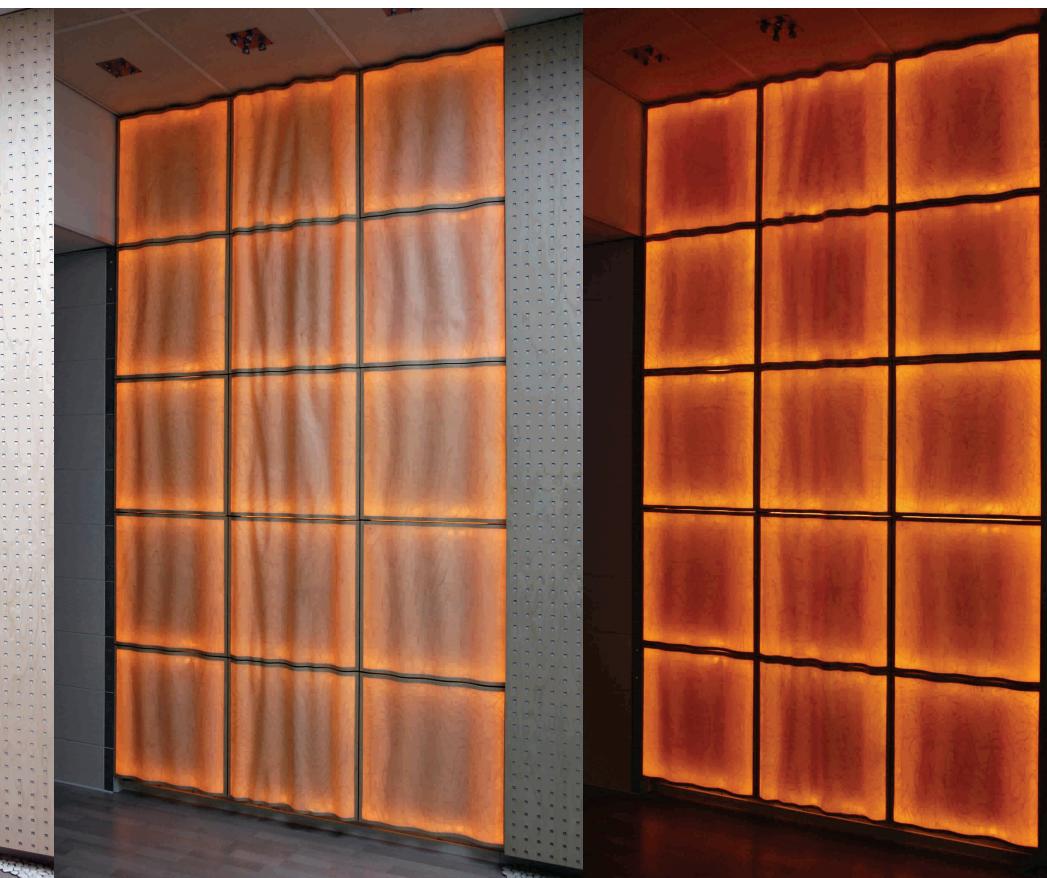

PLY back light

PLY 1 MATRIX

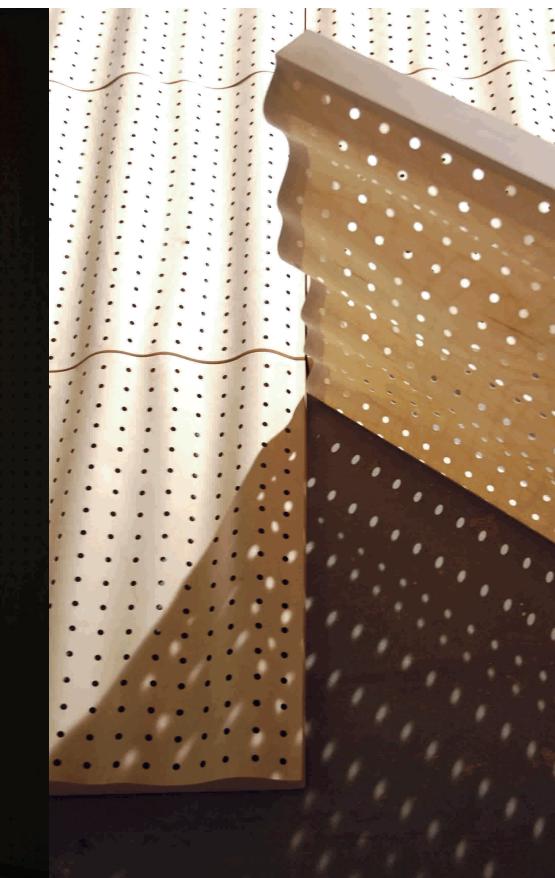

PLY 2 SKY



PLY 1 MOON

